

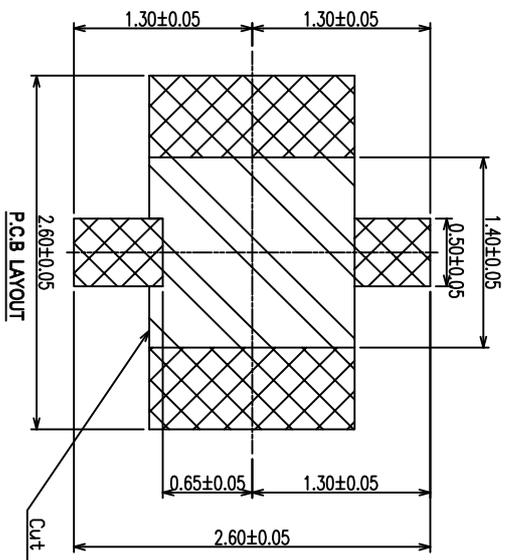


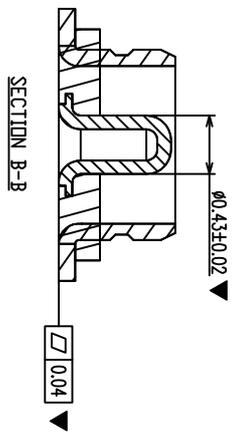
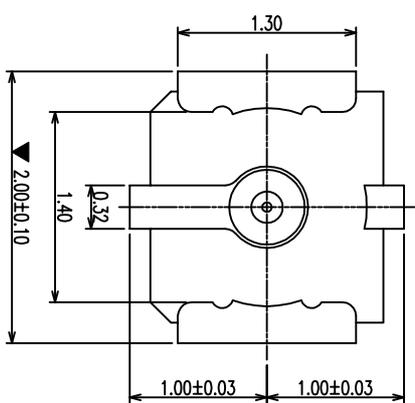


REV	ECON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		

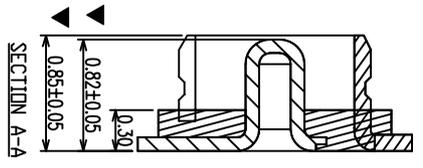

- NOTE:
- Contact Resistance: 20mΩHM Max;
 - Dielectric Withstanding Voltage: 100V AC For 1 Minute;
 - Insulation Resistance: 1000M ΩHM Min;
 - Frequency Range: DC up to 65GHz
VSWR: 1.3 Max. at 0~3GHz;
VSWR: 1.3 Max. at 0~3GHz;
 - Operating Temperature: -40°C to +90°C ;

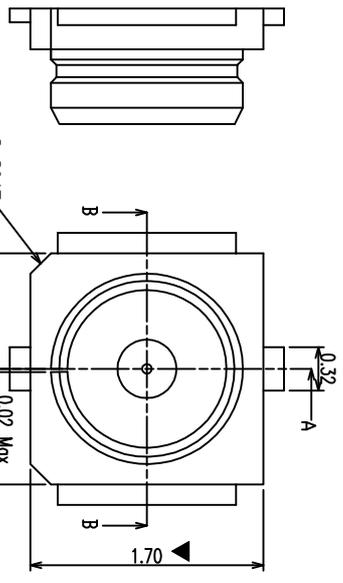

PRODUCT NO. :
RF01-01 A B 12-00
① ② ③ ④
PRODUCT SERIES:
① RF01: USS RF CONNECTOR RECEPTABLE
② PIN NO. :
01: 1PIN
③ MATERIAL:
A: LCP
④ SERIES NO. :
00: 第三代

PRAT DRAWING		YTCONN		Dongguan YTCONN Electronics Technology Co., Ltd	
GENERAL TOLERANCE	X ±0.10 .XX ±0.05 .XXX ±0.02	DRAWING	DEV1	TITLE:	微型射频连接器 第三代
ANGEL TOLERANCE	X ±3° .XX ±2° .XXX ±1°	APPROVED		P/N:	RF01-01AB12-00
		DATE	10/25/13	DRAWING NO.	C-RF01-00
		UNIT	mm	SCALE	2:1
		SIZE	A4	SHEET	1of1
		REV	A		